



# guide*CAST*

public speakers visual timing and signaling

LIGHT ART VISION





At round tables, discussion events, presidential debates or presentations - timing is everything. Each public speaker usually has a given time frame, which should not be exceeded. With guideCAST, a public speaker watches an LED bar-graph, which represents intuitively the remaining time of his time-frame. Similar to a sand watch, once the bar-graph is 'full', the time is over.



# guide*CAST*

public speakers visual timing and signaling







LIGHT ART VISION





## Aesthetic Design

Unlike other systems on the market, guideCAST is very stylish and slim. The Controller seamlessly integrates into existing conference room equipment and is easy to operate.

# guide*CAST*

public speakers visual timing and signaling

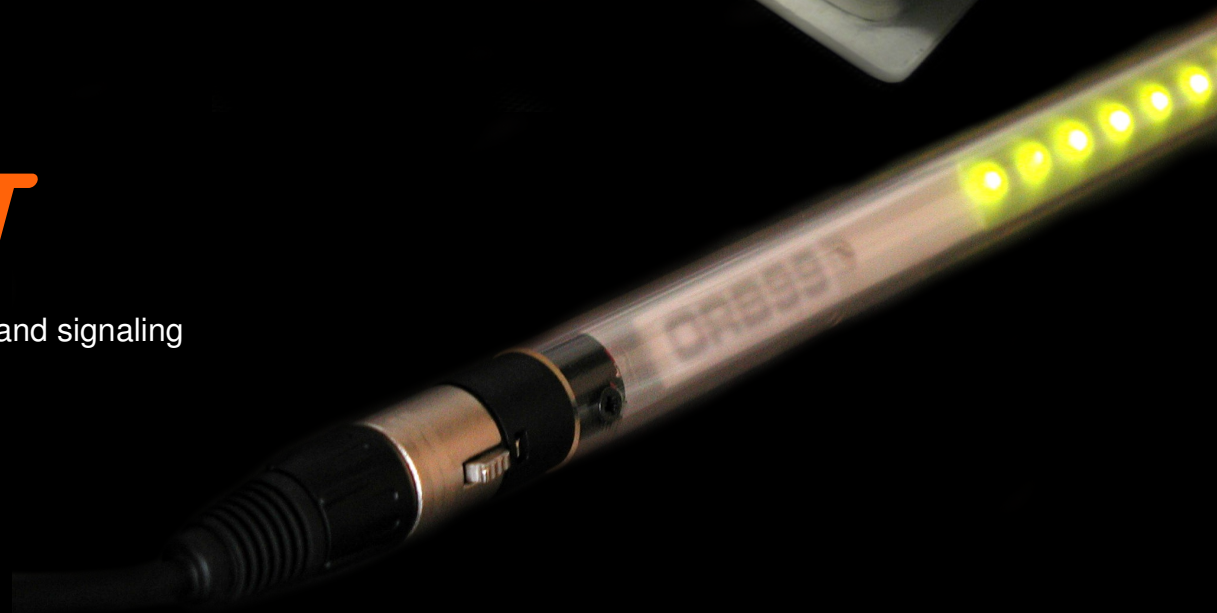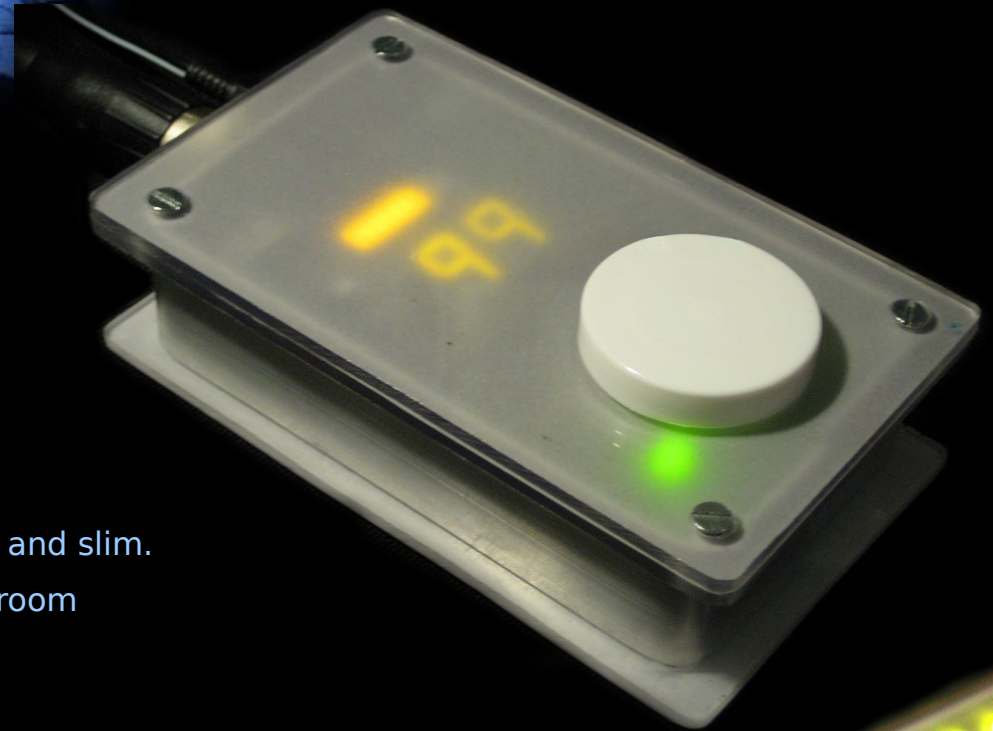


LIGHT ART VISION



# guide*CAST*

public speakers visual timing and signaling

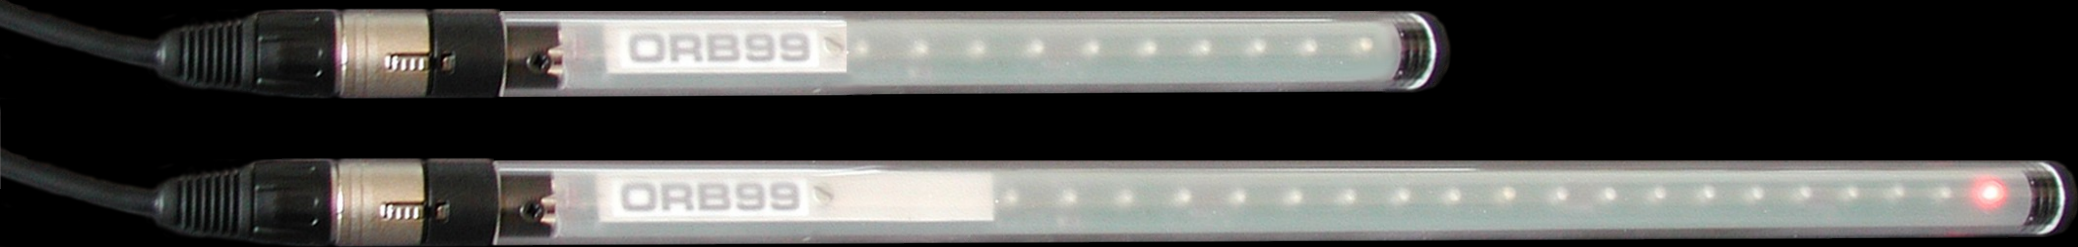

## Perfect visibility

The optical display is a 20mm diameter acrylic glass tube with a frosted coating inside. The short Version (PRIVATE) contains 10 bright LEDs and has a length 15cm. The longer version (PUBLIC) is 60cm long and contains 40 LEDs (20 in the front, 20 in the back) to be seen by the audience. Both tubes connect via XLR Audio connectors.







## Intuitive usability


The guideCAST Controller operates with one button only. Rotating the button sets the time, pressing the button starts and stops the timer. If the button is pressed for more than 3 sec, the system resets.




# guide*CAST*

public speakers visual timing and signaling

LIGHT ART VISION



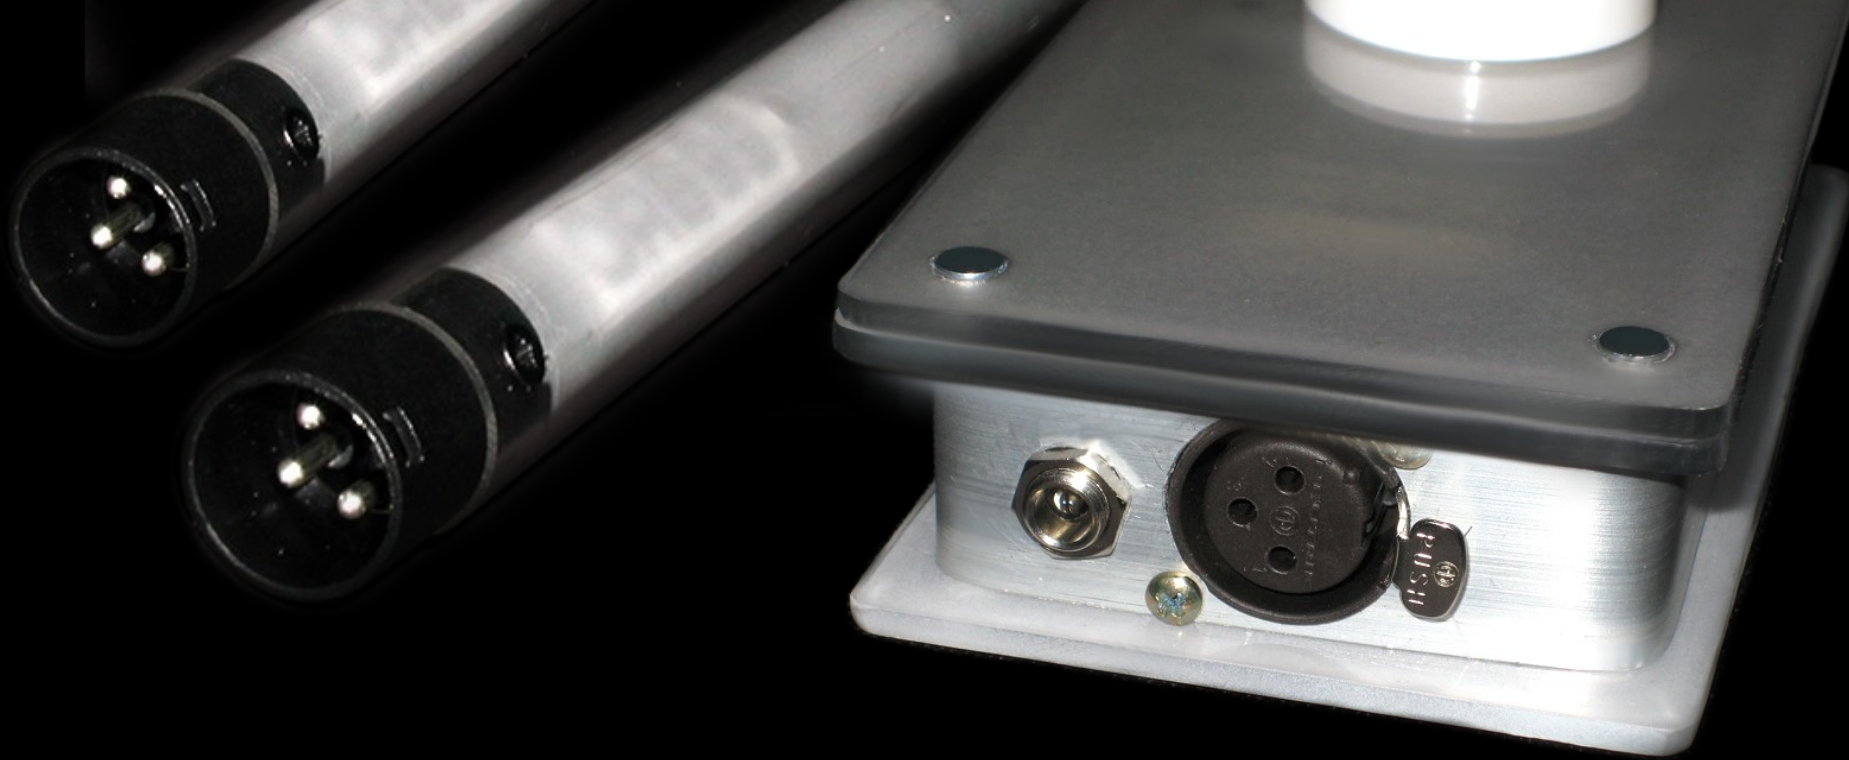

## Easy installation

The LED displays connect to the controller via standard XLR Audio connectors. Most conference rooms are already equipped with pre-installed XLR cables. Distances of about 200m between the guideCAST controller and the displays are not a problem. Using XLR Y cables, multiple displays can be operated simultaneously using one controller.


# guide*CAST*

public speakers visual timing and signaling

LIGHT ART VISION





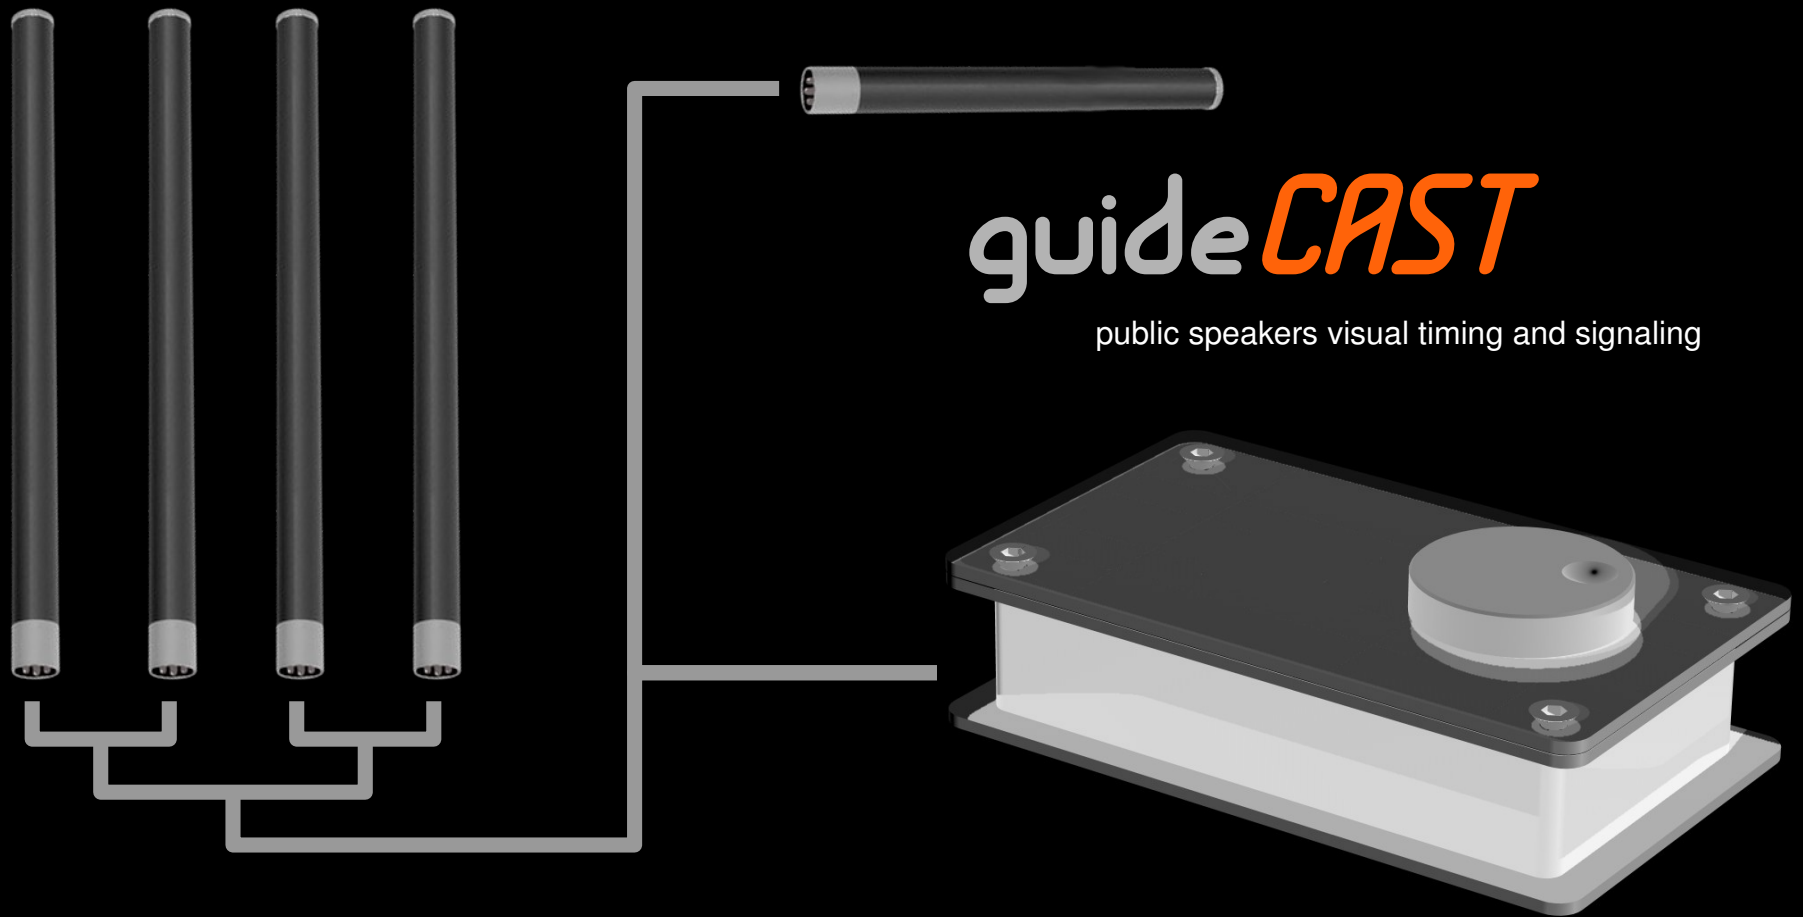


## Scalability

For good visibility for the audience, even in larger conference centers, up to 5 displays can be connected to one controller, using optional standard XLR Y cables.



LIGHT ART VISION



# guide*CAST*

public speakers visual timing and signaling

[www.guidecast.net](http://www.guidecast.net)